Point-of-Sale
 Industrial
 Commercial

## 15.6-inch POP Display Fully Housed With GPIO Buttons

15.6 inch 1920x1080 HD Display, Optional With Capacitive Touch Button & GPIO Push Buttons







#### Highlighted Features

Best Retail Signage Solution 15.6 inch POP Display

> Features like no other: Seamless Playback &

USB auto-copy to Memory Supported

- >15.6 inch 1920x1080 HD Panel with LED backlight your ads message on the best screen conveyed like what you expected;
- > Consumer-friendly appearance, robust inside, built-in GPIO controls, card slot protector, antitheft system, high quality stereo audio output, vesa mounting;

MP1561 is never like a consumer photoframe, but is a POP video screen completely designed for commercial use where running 7/24/365 is crucial. With integrated hardware and software for commercial and retail use, We have developed it into a versatile platform to address various applications in the field: Interactive buttons either via GPIO connector or frontal capacitive touch, VESA mounting, SD card protection & anti-theft system, high-volume stereo audio output, All made it the best advertising solution for the most demanded commercial, industrial and retail environment.

#### Tech Spec

▶LCD Panel Spec:Digital TFT-LCD With LED Backlight

▶Panel Size: 15.6-inch;

▶Resolution (pixels): 1920x1080;

►Aspect Ratio (W:L): 16:9;

▶Brightness: 300CD/m²;

▶Contrast Ratio: 700:1;

▶Viewing Angle: U89/D89/L89/R89;

▶Built-in Flash Memory: Optional 4G/8G;

▶Memory Card Supported: SD Card;

Media File Formats Supported: JPG /BMP /PNG; MP3,WAV; Avi (.xvid), MP4, mov (MPEG1/2/4 1080P);

#### ► Seamless Video Playback: 720P Videos;

▶Interface: DC-in, On-Off Switch; SD Card Slot, USB Host, Volume Knob;

▶Built-in Speakers :2W \* 2 Stereo Speakers;

▶On-Board Volume Control: Built-in Volume Knob;

▶OSD & Remote Control: Yes, Optional;

▶OSD Lanaguage: English;

►AC Power Adapter: AC in 100-240V; DC Out 12V 1.5A;

▶Unit Size: 396.8x246.1x37.2mm;

▶Body Materials: Frontal tempered glass, back & middle frame ABS+PC;

▶GPIO Controls (Optional ): Up to 4, Molex Connector, Cable length 60mm as default;

► Motion Sensor: Optional, external connected; or Built-into frontal frame;


Frontal Capacitive Touch Buttons(optional): Up to 4 touch spots, with silk printing & LED light;

▶ Frontal Capacitive Touch Buttons Optional: Up to 5;

Point-of-Sale
 Industrial
 Commercial

# 15.6-inch POP Display Fully Housed With GPIO Buttons

15.6 inch 1920x1080 HD Display, Optional With Capacitive Touch Button & GPIO Push Buttons

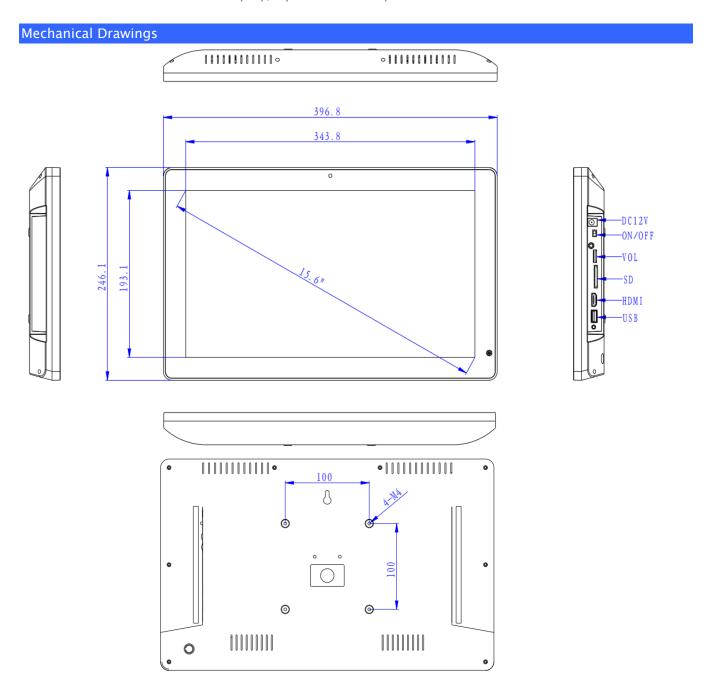

### **Ordering Options:**

Player Console: 15.6-inch Video Screen

AC Adatper: 12V /1.5A

Optical Sensor Buttons: Optional; VESA Wall Mounts:Optional; GPIO controls Protector:Included; SD Card Protector: Included