

eARC Soundbar Audio Only Retail Demo Mode Explained



USB auto copy port




7# button for V+,
8# button for V-

1 > Function Designed:

Power on auto loop the file named mu (mute), the soundbar selection button 1# & 2# start blinking, volume buttons stay off, Press button 1# or 2# for A/B comparison, sound goes into the selected soundbar, and the selected button becomes constantly lighted, the unselected one becomes off; And volume buttons become lighted; Press the same button again to return to default mu loop, LED returns to the default blinking, volume buttons become off; Press volume buttons to adjust volume.

2 > File & Folder Structure In The USB drive & the final folder of the media files

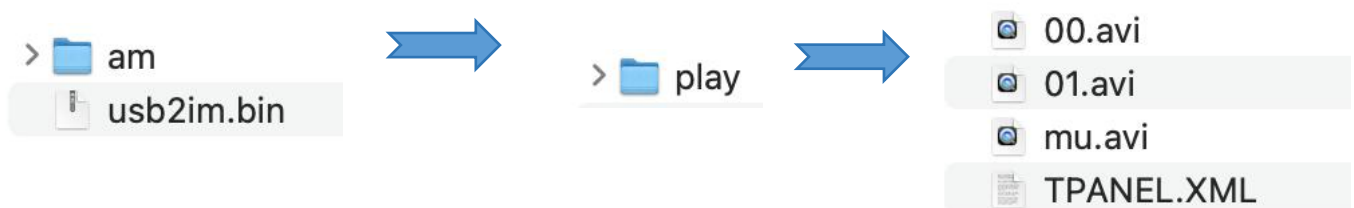

**usb2im.bin is the operator file for security; 00.avi for demo video of port 1#, 01.avi for demo video of port 2#; mu.avi is the loop file. TPANEL.XML is the configuration file. /// replace the video files with your own, but keep the file names unchanged,

3 > Video specifications: please make sure the video specifications comply with the following:

Video formats: *.mkv, *.wmv, *.mpg, *.mpeg, *.dat, *.avi, *.mov, *.iso, *.mp4, *.rm
<1>- mu is mute; <2> -4K video: AVC/H264, 4K@30fps; HEVC/H265, 4K@60fps

4 > Update video content and play control script (for function update, we can change some parameters inside)

```
<programe>
<set ver="1" xhp="1" width="1920" height="1080" volunit="16" volbtn="0">
<title="MU" hp="AU" interval="0" bled="ALL" bledfcn="FLASH" bledotherfcn="FLASH" vledfcn="OFF" GVAR0="99"
cmmsg="[L40606L];[L40706L]" xmsg="A2AA00A" vol="8" volmin="0" volmax="16" back="CUR"/>
<btn="GVAR0" type="0" back="CUR"/>
<btn="00" type="1" file="00" interval="0" mode="0" hp="00" bled="00" bledfcn="ON" bledotherfcn="OFF" vledfcn="ON"
GVAR0="00" cmmsg="[L40616L];[L40716L]" xmsg="A20010A" back="CUR"/>
<btn="01" type="1" file="01" interval="0" mode="0" hp="01" bled="01" bledfcn="ON" bledotherfcn="OFF" vledfcn="ON"
GVAR0="01" cmmsg="[L40616L];[L40716L]" xmsg="A20110A" back="CUR"/>
<btn="06" type="7" xmsg="A++A" back="CUR"/>
<btn="07" type="7" xmsg="A--A" back="CUR"/>
</programe>
```

5 > USB auto copy Operations Guide:

- 1) Insert USB drive when the unit is working;
- 2) The button LED will blink in a chain;
- 3) After the copy succeeds, the LED light turns off /on randomly. Then pulling off USB drive, it auto plays the new content.
- 4) For new function other than the sample, the script in TPANEL.xml needs to be modified.