



> Commercial Tablet , VideoScreen , Monitor

> OpenFrame & All-in-One 1080P / 4k Player

· Point-of-Sale · Industrial · Commercial

43" LCD Industrial Monitor

Commercial-Grade HD LCD Monitor With HDMI-in

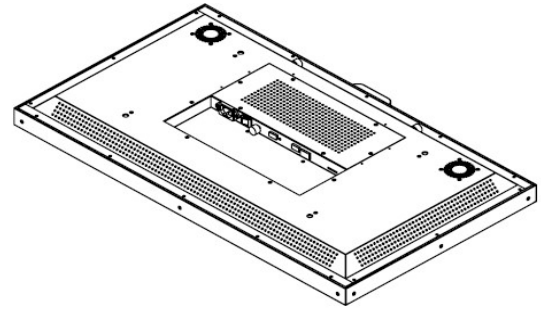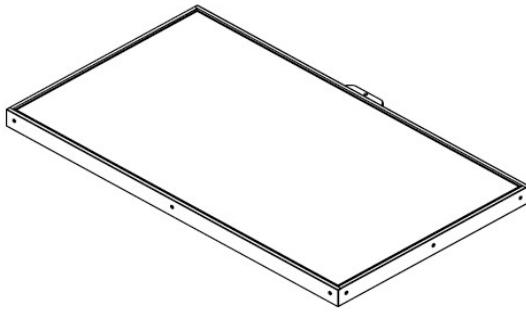

HB4300

LCD Panel Information

Screen size : 43" (Diagonal)
Active area : 940.896(W)×529.254(H) mm
Max. Resolution : 1920(RGB)×1080, FHD 51PPI
Brightness : 2800 cd/m² (Typ.)
Contrast ratio : 1100 : 1
Viewing angle : 89/89/89/89(L/R/U/D)
Aspect Ratio: 16:9

Interface

AC-in: 100-245V, 50/60Hz;
USB: USB 2.0 Host
HDMI-in(1.3): x1
DVI-in: x1 Optional
VGA-in: x1 Optional
Composite: x1 Optional



Working Conditions

Operating Temperature: 0°C to 50°C
Relative Humidity : 5% - 95% (Non-Condensing)

Shipping Info

W x D x H Unit /Packing : 963.4x551.4x57.2/1073x672x96mm
Weight: 24Kgs

Mechanical Drawings

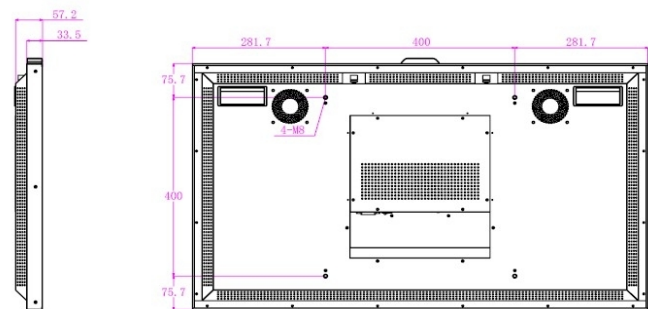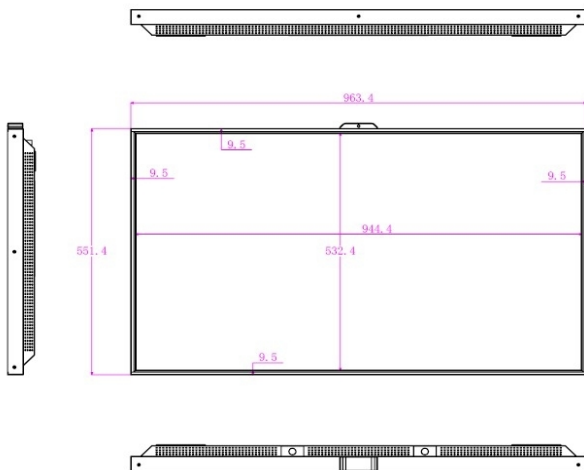

> Commercial Tablet , VideoScreen , Monitor

> OpenFrame & All-in-One 1080P / 4k Player

· Point-of-Sale · Industrial · Commercial

75" Ultra High Brightness LCD Industrial Monitor

Designed for outward-facing window displays in direct sunlight



HB7500

LCD Panel Information

Screen size : 75" (Diagonal)
Active area : 1649.7(W)×927.9(H) mm
Max. Resolution : 3840(RGB)×2160
Brightness : 2800 cd/m² (Typ.)
Contrast ratio : 1100 : 1
Viewing angle : 89/89/89/89(L/R/U/D)
Aspect Ratio: 16:9

Interface

AC-in: 100-245V, 50/60Hz;
HDMI-in(2.1): x1




Working Conditions

Operating Temperature: 0°C to 50°C
Relative Humidity : 5% - 95% (Non-Condensing)

Shipping Info

W x D x H Unit /Packing : 1674x953x57.4/1830x1120x246mm
N.W. / G.W. : 48.5 /63.3 Kgs

Mechanical Drawings

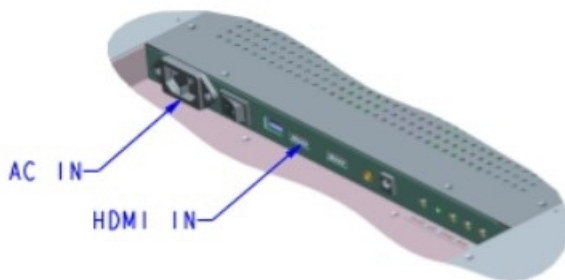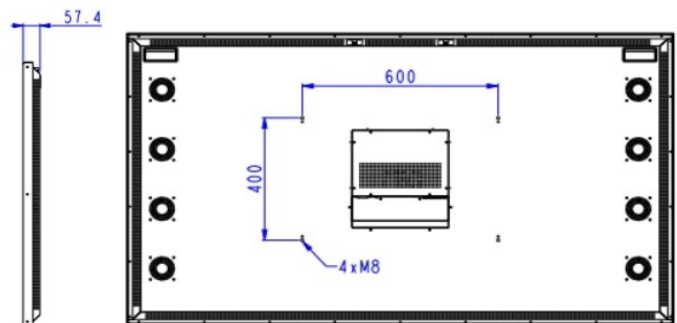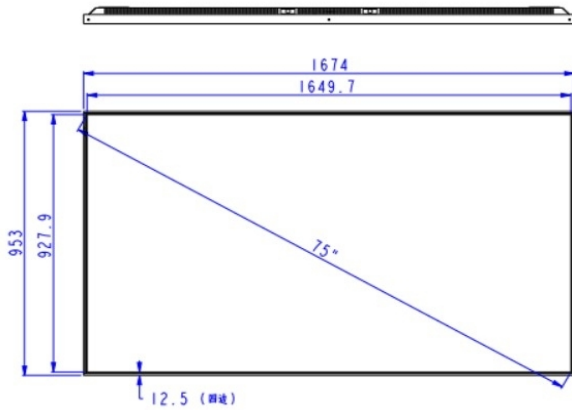

细节 A
比例 1:4

